



CURTAIN



0.5mm continuous brake pressed steel curtain.

SIZE

	MINIMUM	MAXIMUM
HEIGHT	1200mm	3600mm
WIDTH	2000mm	3760mm

BOTTOM RAIL

Aluminium bottom rail with weatherseal.

Taper: Optional. To maximum 5500mm (w). Minimum taper ratio is 1:150.

Maximum taper ratio is 1:10, with maximum total taper 250mm.

GUIDES

Supplied with 50mm galvanised steel guides.

Windlocking: None.

DRUM

Pressed galvanised metal.

SPRINGS

Spring life designed for 20,000 cycles.

OPERATION

Nylofelt® minimises friction, ensures continuous smooth, quiet operation for a minimum of 20,000 cycles.

MANUAL

- Doors up to 2400mm (h) - with or without hauling chain wheel equipment.
- Doors over 2400mm (h) - direct drive chain equipment.

AUTOMATED

- GDO-10
- AXESS PRO

BRACKETS

Hot dipped, galvanised 50mm hot rolled steel.

LOCKING

Waist high slide bolt locking is located internally and supplied on the left hand side as standard.

OPTIONS

On wider doors locks are fitted both sides.

Centre lift lock with external key and internal knob operation.

Internal and/or external bottom rail slide bolt locking.

Chain locking. Chain cleat is not lockable.

FINISHES

Extensive range of standard Colorbond® colours and Zinalume® finish.

OPTIONS



Ventilation: Optional. Slotted.

Mullions: N/A

Personnel access: N/A

Wicket gates: N/A

CLEARANCES

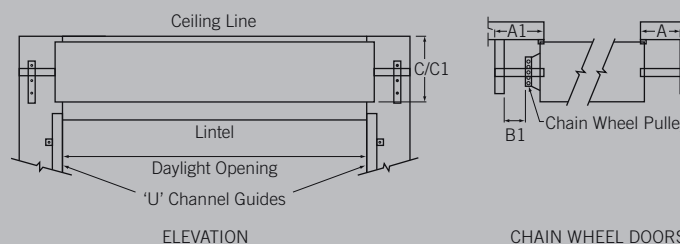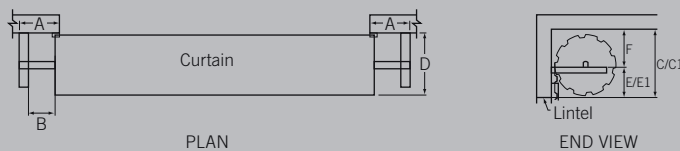

DIMENSIONS

HEIGHT	A	A1	A1*	B	B1	C	C1	D	E	E1	F
Up to 2400	135	135	195	35	N/A	450	420	540	150	90	300
2401-3050	135	205	195	35	N/A	450	420	540	150	120	300
3051-3300	135	205	195	35	5	460	430	560	150	120	310
3301-3600	135	205	195	35	5	460	N/A	560	150	N/A	310

